




SUBMITTAL DATA

JOB/CUSTOMER:	SUBMITTED BY:
ENGINEER:	APPROVED BY:
CONTRACTOR:	ORDER NO:
SPECIFICATION REFERENCE:	

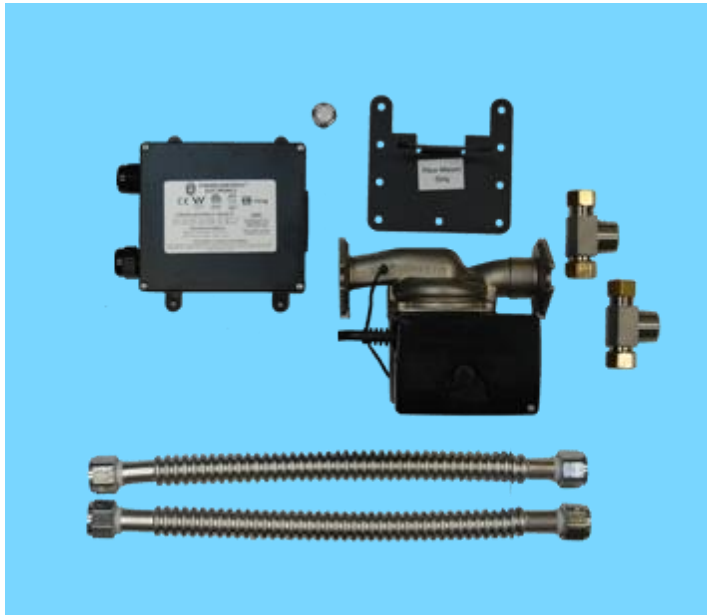

INCLUDES

Standard package comes with:

- | | |
|---|-----------------------|
| (1) S3-100 | (1) Hard-Wired Button |
| (1) Control Box Black w/ power cord, activation wires | |
| (2) Stainless Steel Tees | (2) 18" Flex Lines |
| (1) Small Mounting Bracket | |


OPTIONAL ACCESSORIES

- | | |
|---|---|
| <input type="checkbox"/> Hard-Wired LED Button | <input type="checkbox"/> Bluetooth Wireless Transmitter Kit |
| <input type="checkbox"/> Hard-Wired Rocker Switch | <input type="checkbox"/> Bluetooth Wireless Motion Sensor |
| <input type="checkbox"/> Hard-Wired Motion Sensor | <input type="checkbox"/> Under Sink Mounting Kit
<small>(For Systems without Return Lines)</small> |

TECHNICAL DATA

FLOW RANGE: 0-25 GPM	MAX. WORKING PRESSURE: 145 PSI
HEAD RANGE: 0-18 FEET	CONNECTORS: GF 15/26 Flange (With 3/4" Stainless Steel MIP not shown in picture)
MOTORS: 2-POLE SINGLE PHASE	HP MAX. SPEED: .116 hp
MIN. FLUID TEMPERATURE: 36° F	VOLTAGE (max. spd.): 115v/87 watts/.75 Amps
MAX. FLUID TEMPERATURE: 230° F	APPROX SHIP WEIGHT: 12 LBS

DIMENSIONS

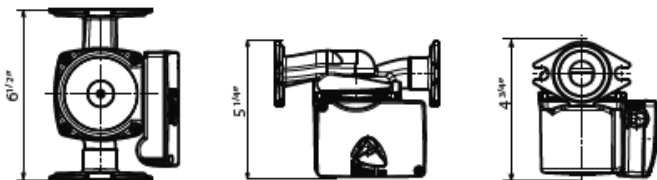

* Dimensions shown do not include connectors

PERFORMANCE CHART

