




SUBMITTAL DATA

JOB/CUSTOMER:	SUBMITTED BY:
ENGINEER:	APPROVED BY:
CONTRACTOR:	ORDER NO:
SPECIFICATION REFERENCE:	

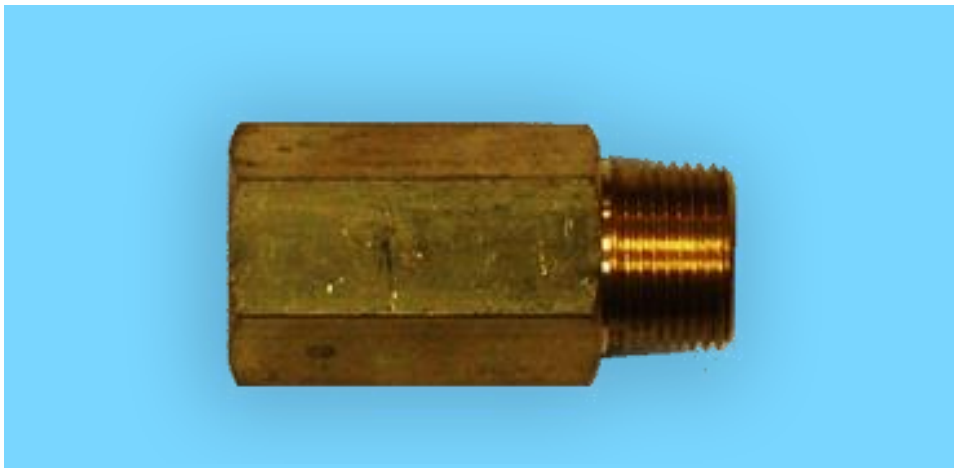

DESCRIPTION

The HSV-101-2 Valve stops hot water from passing through the System when the pump is not operating.

It is used in addition to the pump's internal check valve where the user has excessive water pressure or unregulated cold water discharge close to the pump (i.e. hose bibs, sprinklers, pool pumps etc.). When hot water reaches the valve it closes until the water cools off. Once cooled, it will then release and open.

INCLUDES

The Original D'MAND KONTROLS® System Standard package comes with:
 (1) Hot Water Safety Valve (1) HSV 101-2 Instructions

TECHNICAL DATA

Inlet: 3/4" FIP

Outlet: 3/4" MIP

NO LEAD BRASS CONSTRUCTION


APPLICATIONS

Works with all ACT Inc., D'MAND Kontrols® Systems where there is a need for a temperature activated safety valve.

HSV-101-2 affixes on the discharge side of the ACT Inc., D'MAND Kontrols® System using the 3/4" FIP and 3/4" MIP threads to install inline.

These are for INDOOR USE ONLY and cannot be used in areas that may have direct exposure to water or extreme heat.

DIMENSIONS

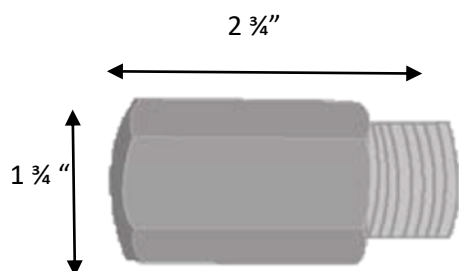

WARRANTY

Accessories: Hardwired Buttons, Wireless Transmitters and Receivers, all Hardwired or Wireless Motion Sensors and Receivers: Warranty (One Year from date of purchase) Labor is not included with Limited Warranty. In order to obtain services under this warranty, it is the responsibility of the purchaser to promptly notify the Company in writing and promptly deliver the item in question, delivery prepaid to the factory. The address for notification and delivery is ACT, Inc. D'MAND KONTROL® Systems, 3176 Pullman Street, Suite 119, Costa Mesa CA 92626. If the product or part in question contains no defects as covered in the warranty, the purchaser will be notified and billed for parts and labor charges in effect at the time of the factory examination and repair.