

SUBMITTAL DATA

JOB/CUSTOMER:

SUBMITTED BY:

ENGINEER:

APPROVED BY:

CONTRACTOR:

ORDER NO:

SPECIFICATION REFERENCE:

OPTIONAL ACCESSORIES

- ☐ Hardwired LED Button
- ☐ Hardwired LED Rocker Switch
- ☐ Hardwired Motion Sensor
- ☐ Bluetooth Wireless Transmitter
- ☐ Bluetooth Wireless Motion Sensor
- ☐ Bluetooth Repeater



PROGRAMMABLE DIGITAL CONTROLLER

INCLUDES

The *Original D'MAND Kontrols® System* Standard Package Comes with:

- | | |
|--|---|
| (1) Control Box ACT2 w/ power cord, activation wires | (1) Small Mounting Bracket |
| (1) ACT1 Pump | (2) Blue POM Tees $\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{3}{4}$ " |
| (1) Integrated Bluetooth Activation | (2) $\frac{1}{2}$ " x $\frac{3}{8}$ " x 12" Flex Lines |
| (1) Integrated Check Valve | (2) $\frac{3}{4}$ " x 18" Flex Lines |
| (1) Integrated Temperature Sensor | (2) $\frac{1}{2}$ " FPT x $\frac{3}{8}$ " Male Comp Adapters |
| (2) Wireless Bluetooth Transmitters | (1) Anchor Pack & (2) BT Anchor Packs |

TECHNICAL DATA

FLOW RANGE: 0-15 GPM

MAX. WORKING PRESSURE: 145 PSI

HEAD RANGE: 0-24 Ft.

CONNECTORS: 1" BSP Union x $\frac{3}{4}$ " MIP

MOTORS: 2-POLE SINGLE PHASE

RPM/HP: 3450 RPM/.17HP


MIN. FLUID TEMPERATURE: 36°F

VOLTAGE (max. spd.): 115V/125 watts/1 Amp

MAX. FLUID TEMPERATURE: 150°

APPROX SHIP WEIGHT: 10 LBS

DIMENSIONS

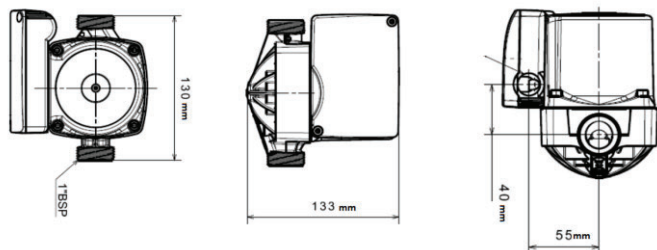

PERFORMANCE CHART

