

SUBMITTAL DATA

JOB/CUSTOMER:

SUBMITTED BY:

ENGINEER:

APPROVED BY:

CONTRACTOR:

ORDER NO:

SPECIFICATION REFERENCE:

OPTIONAL ACCESSORIES

- ☐ Hardwired LED Button
- ☐ Hardwired LED Rocker Switch
- ☐ Hardwired Motion Sensor
- ☐ Bluetooth Wireless Transmitter Kit
- ☐ Bluetooth Wireless Motion Sensor
- ☐ Bluetooth Repeater

PROGRAMMABLE DIGITAL CONTROLLER

INCLUDES

The Original D'MAND KONTROLS® System Standard package comes with:

- (1) ACT2 Control Box w/ power cord, activation wires
- (1) SS3-200 Pump
- (1) Integrated Bluetooth Activation
- (2) Stainless Steel Tees 1/2" x 1/2" x 3/4"
- (1) Large Mounting Bracket
- (1) Integrated Check Valve
- (1) Integrated Temperature Sensor
- (2) Flanges with Bolts and Nuts
- (2) 3/4" x 18" Flex Lines
- (1) Hardwired Activation Button
- (1) Anchor Pack

TECHNICAL DATA

FLOW RANGE: 0-33 GPM

MAX. WORKING PRESSURE: 145 PSI

HEAD RANGE: 0-29 Ft.

CONNECTORS: GF 15/26 Flange (With 3/4" Stainless Steel MIP not shown in picture)

MOTORS: 2-POLE SINGLE PHASE

RPM/HP: 3450/.262hp


MIN. FLUID TEMPERATURE: 36°F

VOLTAGE (max. spd.): 115V/197 watts/1.80 Amps

MAX. FLUID TEMPERATURE: 230°F

APPROX SHIP WEIGHT: 16 LBS

DIMENSIONS

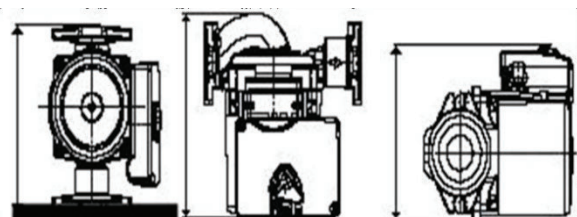

PERFORMANCE CHART

